

The South East's leading manufacturer [®]



Ideal Windows

U.K. LTD.

Fully Reversible UPVC Windows

If you're looking for **enduring quality** and **beauty** coupled with the latest window, the Ideal Window system offers everything you could ask for.

Crafted from highly durable PVC-U, it combines outstanding standards in energy efficiency and performance with stunning contemporary profiles.

As the leading manufacturer of PVC-U window systems, Ideal Windows enjoys an enviable reputation for high standards and amazing designs.

With over 25 years' extensive experience in producing the highest quality UPVC systems, our exceptional products ensure our installers receive only the best for your home or workplace.



So – whether you're searching for Ideal Windows in modern White or Traditional Woodgrain finishes such as Mahogany, Rosewood and Golden Oak, Ideal Windows has the solution for a more energy efficient home.

Mahogany



Golden Oak



Rosewood



Dual Colour



Ideal Windows (UK) Ltd

www.idealwindows.co.uk

1 Lagoon Road, Orpington, Kent BR5 3QX | Tel: 01689 823388 | Fax: 01689 821110



BS7900:2012
KMS46070

BS7900:2012
KMS46067

BS7412:2007
KMS46068

BS4873:2009
KMS46065



Ideal Windows

U.K. LTD.

Fully Reversible UPVC Windows

Characteristics

- Allows easy manufacture in combination with fixed lights, tilt and turn and casement windows from the S706 system
- Designed to meet all known specifications
- Possible combinations include: top turn or side turn with fixed lights, tilt and turn and casement windows
- 70mm profile depth matches British architecture and is the ideal replacement for timber sections
- All external sections have a 50° chamfer for optimal aesthetic appearance and to match putty line
- Integrates with the range of S706 supplementary profiles and sills

Appearance

- Available in white, mahogany and rosewood both sides as standard
- Other RAL colours available

Reinforcement

- Totally separate reinforcement chambers in profiles enables galvanised steels to be inserted for additional strength when required


Insulation

- Complies with the requirements of the Building Regulations covering Conservation of Fuel & Power - Part L (England & Wales) and Part J (Scotland) when glazed using the correct type of sealed unit
- Sound insulation is dependent on glazing specification.

Fittings and hardware

- Accepts a wide range of popular hinge types
- Cockspur handles
- Espagnolette or shootbolt locking options

- All fittings can be fastened into metal reinforcement for additional strength/security
- Manufacturers recommendations on maintenance should be followed

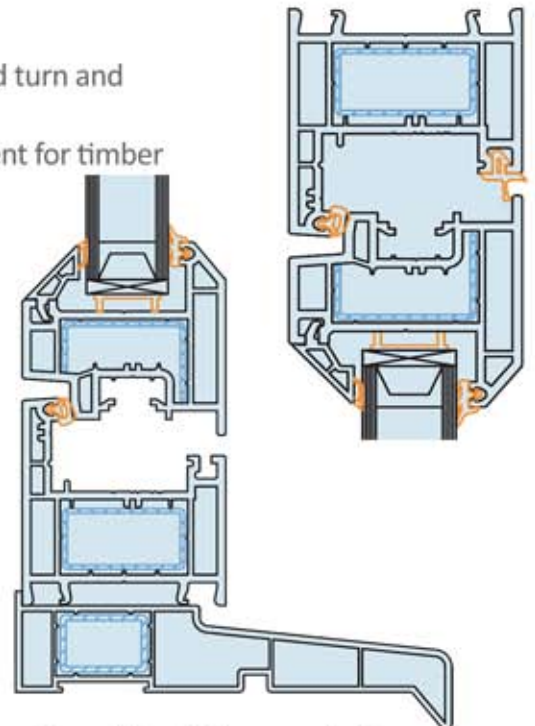

Maximum & Minimum Sash Sizes		Reversible		
NB: These sizes are for guidance only and are dependent on fittings and hardware used.				
Sash	Finish	MAX / MIN		
		W x H cm	m ²	kg
Sash Z	White	120x150	1.8	60
Sash Z	White	520x700	0.4	60
Sash Z	Coloured / Foiled	120x150	1.8	60
Sash Z	Coloured / Foiled	520x700	0.4	60

Glazing

- 4mm to 42mm glazing
- Internally beaded for security and ease of glazing
- Sloped, semi-sloped or featured co-extruded glazing beads for choice of aesthetics
- Co-extruded solid and cellular EPDM casement seal for optimum performance
- Integral head-drip for high performance and improved aesthetics



Ideal Windows (UK) Ltd

www.idealwindows.co.uk

1 Lagoon Road, Orpington, Kent BR5 3QX | Tel: 01689 823388 | Fax: 01689 821110

