

The South East's leading manufacturer [®]



Ideal Windows

U.K. LTD.

Tilt & Turn UPVC Windows

If you're looking for **enduring quality** and **beauty** coupled with the latest window, the Ideal Window system offers everything you could ask for.

Crafted from highly durable PVC-U, it combines outstanding standards in energy efficiency and performance with stunning contemporary profiles.



As the leading manufacturer of PVC-U window systems, Ideal Windows enjoys an enviable reputation for high standards and amazing designs.

With over 25 years' extensive experience in producing the highest quality UPVC systems, our exceptional products ensure our installers receive only the best for your home or workplace.

So – whether you're searching for Ideal Windows in modern White or Traditional Woodgrain finishes such as Mahogany, Rosewood and Golden Oak, Ideal Windows has the solution for a more energy efficient home.

Rosewood Dual Colour



Mahogany



Golden Oak



Ideal Windows (UK) Ltd

www.idealwindows.co.uk

1 Lagoon Road, Orpington, Kent BR5 3QX | Tel: 01689 823388 | Fax: 01689 821110



BS7000:2009
KMS46007

BS7000:2009
KMS46007

BS7000:2009
KMS46007

BS7000:2009
KMS46007



Ideal Windows

U.K. LTD.

Tilt & Turn UPVC Windows

Key Characteristics

- Choice of chamfered profiles using S706 or fully sculptured using the REHAU-Edge system
- Both options offer extremely slim sight-lines and enhanced aesthetic appeal
- Inward opening for effective fire escape, easy cleaning and where restricted space outside makes outward opening hazardous
- Full range of supplementary profiles available to suit all installation requirements

Appearance

- Available in white, mahogany, rosewood and golden oak on white, mahogany, rosewood and golden oak both sides as standard
- Other non-standard laminate options and the range of RAL colours available

Reinforcement

- Galvanised steel reinforcement for sashes over 500mm wide by 800mm high

Approvals



- BBA - assessment report no. 1108
- BS7412 - report no. BG003235 & BG003532
- BS7950 - report no. 261/4421465/ 3 of 4

Insulation

- Complies with the requirements of the Building Regulations covering Conservation of Fuel & Power - Part L (England & Wales) and part J (Scotland) when glazed using the correct type of sealed unit
- Sound insulation is dependent on glazing specification

Fittings and Hardware

- 16mm eurogroove ensures maximum choice of standard fittings, some of which include the tilt before turn option as well as restrictors
- Manufacturers recommendations on maintenance should be followed

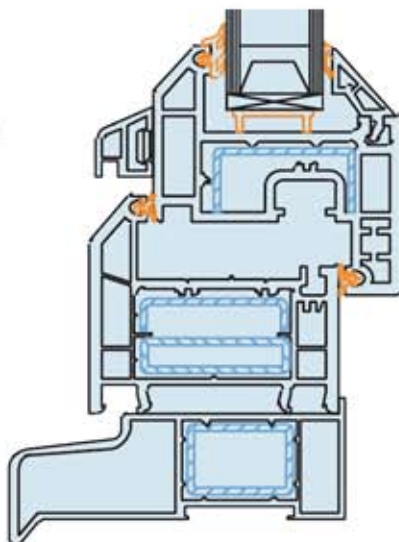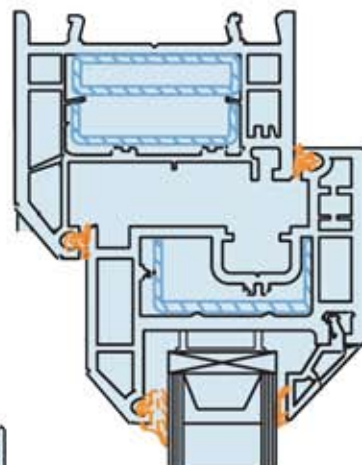

Maximum & Minimum Sash Sizes		Tilt / Turn		
NB: These sizes are for guidance only and are dependent on fittings and hardware used.				
Sash	Finish	MAX / MIN		
		W x H cm	m ²	kg
Sash Z	White	120x150	1.8	60
Sash Z	White	520x700	0.4	60
Sash Z	Coloured / Foiled	120x150	1.8	60
Sash Z	Coloured / Foiled	520x700	0.4	60



Ideal Windows (UK) Ltd

www.idealwindows.co.uk

1 Lagoon Road, Orpington, Kent BR5 3QX | Tel: 01689 823388 | Fax: 01689 821110

